## **Smart Look Glass Door Fingerprint Lock Multi Function**

## **Basic Information**

- Place of Origin:
- Guangdong, China

9999 Acre/Acres per Day

ELA

- Brand Name:
- D5 Model Number:
- Minimum Order Quantity: 100 sets Negotiable
- Price:
- Supply Ability:



## **Product Specification**

- Product Name:
- Glass Door Fingerprint Lock
- Door Type:
- Glass Door, Wood Door, Steel Door,

Apartment / Home

- Stainless Steel Door, Aluminum Door
- Application:
- Material:
- Function:

Network:

- Door Thickness:
- Suitable For:
- Unlock Method:
- Mortise Option:
- Port:
- Color:

35-55mm Widely

Multi-function

Zinc Alloy

- Semiconductor Fingerprint + MFcard + Password + Key + TUYA WIFI
  - **PUSH/PULL** Mortise
  - Dongguan

Wifi

- Highlight:
- Black Smart Look Glass Door Fingerprint Lock, Multi Function Glass Door Fingerprint Lock

### **Product Description**

#### Smart Glass Door Fingerprint Lock / smart look door home



## **Product Description**

## Smart Glass Door Fingerprint Lock / smart look door home

Door Type	Glass door, Wood door, Steel door, Stainless Steel door, Aluminum door	
Place of Origin	Guangdong,China	
Brand Name	ELA	
Model Number	D5	
Data Storage Options	Cloud	
Network	wifi	
Application	Apartment	
Product Name	Smart Fingerprint Door Lock	
Color	Black	
Suitable for	Widely Usage	
Function	Multi-function	
Door thickness	35-55mm	
Unlock Method	Semiconductor fingerprint + MFcard + password + key + TUYA WIFI+REMOTE	
Ways to Open	APP+Fingerprint	
Warranty period	2 years	
Power supply	4 AA battery	

The Smart Glass Door Fingerprint Lock is a cutting-edge technology that combines the convenience of a fingerprint lock with the sleek design of a glass door. This innovative lock allows homeowners to easily secure their homes by simply placing their finger on the scanner.




## Clutch protection + reduction motor

Intelligent automatic deceleration, all metal high-quality motor

The service life is three times longer than that of ordinary motors

enne

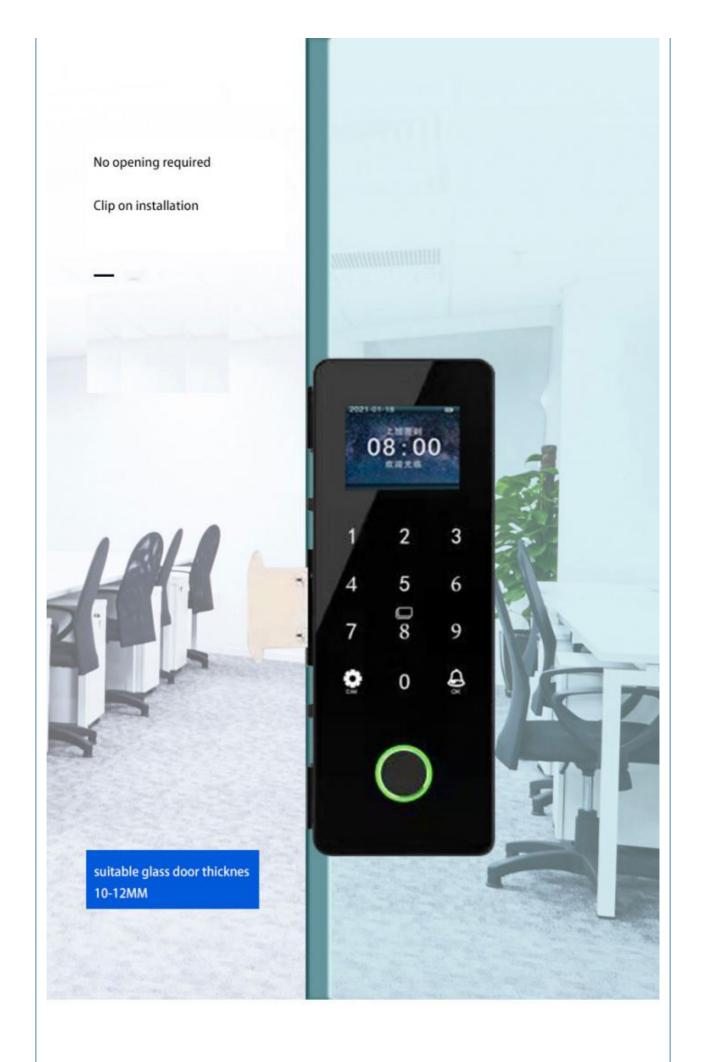


# Excel report output

You can view the door opening record directly or export it

View employee attendance records at any time

	1		0			E	. F.	.0			1	HC .	1	M.	N	0	P	
3      BI      12;000001      N      16      5      967;00005      110      112      132      142      133      142      133      142      133      142      133      142      133      142      133      142      133      142      133      142      133      142      133      142      133      143      113      142      133      142      133      143      133      10	1	日期 2010-0	08-01 - 201	19-12-30					桐十	「记习	<b>於</b> 表							_
3      3      3      13.26      17.20 18.10      14.03 19.36      14.03 19.36      14.03 19.36      14.03 19.36      14.03      14.01      14.01      14.01      14.03      14.01      14.03      14.01      14.03      14.01      14.03      14.01      14.03      14.01      14.0	3	<b>尚</b> I	工号:00000	101	3.0		6-		7 =				118	11	13-	14 =	55.01	-
2  方面  3二  4三  5円  6五  7六  8日  9  10□  11Ξ  12 円  13 09  14    6  日期繁華  3  3二  4Ξ  5円  6五  7六  8日  9  10□  11Ξ  12 円  13 Δ  14 ½  15日  14    9  方面  -  -  -  -  -  20 24  -  10□  11Ξ  12 Π  13 Δ  14 ½  15日  14    9  方面  -  -  -  -  20 24  -  12  12 27  21 34  18 Δ  18 -    10  日期変単  19Ξ  19Ξ  29 Δ  21 20  23 10  -  12  21 -  12  21 -  12  22 10    11  月面  -  -  -  -  22 20  23 10  -  -  -  12  2Ξ    12  日期変単  -  -  -  -  9 Ξ  19 Π  11 Δ  12 Δ  14  14-  15 Ξ  16 Ξ  17 Π  18 Δ    13  月面  -  -  -  9 Ξ  19 Π  11 Δ  12 Δ  12 Δ  21 Π  14 Ξ  14 Ξ <th>5</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>17:20</th> <th></th> <th></th> <th>14:03</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>Ī</th>	5								17:20			14:03						Ī
7    8    III    1    4    5    8    6    7    6    9    10    11    11    13    13    14    16    11      9    \$\vee B\$    10    11	0	日期呈期	17大	10日	19~-	20 _	21 三	22 西	23 <u>F</u> i	34 穴	20日	20.24	11 <u>=</u>	28 📃		30 <u>T</u>	計入	ŧ
9. 考野  25.39  22.39  22.39    10  田陽変類  14 三  19 四  29 五  21 九  12 日  23 - 23 10  23 五  24 西  23 五  23 五  24 西  23 五  23 五 <td>7.</td> <td></td> <td>2-</td> <td>3=</td> <td>4Ξ</td> <td>6 [9]</td> <td>·6五</td> <td>7六</td> <td>•8</td> <td>1-</td> <td>10 =</td> <td>1001111</td> <td>12 周</td> <td>13五</td> <td>14六</td> <td>15日</td> <td>16-</td> <td></td>	7.		2-	3=	4Ξ	6 [9]	·6五	7六	•8	1-	10 =	1001111	12 周	13五	14六	15日	16-	
大田      11.18      22.20      23.10      日期度期      14      15二      16三      17周      18五        12      日期度期      4五      5六      6日      7一      9三      10周      11五      12六      13日      14-      15二      16三      17周      18五        13      考型															18.41			Γ
12  日期受職  4五  5六  6日  7一  9三  19回  11五  12六  13日  14-  18二  14三  17酉  18五    13  考許  20日  21-  22.11  21.12  21.12  21.12  21.12  21.12  21.12  21.12  23.21  23.21  23.21  00.16  00.16    INICLING 1.2 +		1	₩Ξ	and the second second second	29 <u>F</u>	計大	and the second se	11-		28 🖂	26 [8]	17 五	卸汽	29 []	30	1=	2Ξ	Þ
13 年勤 14 日期-2期 20日 21-0 23 三 24 四 23 五 24 四 25 五 15 六 27日 26 - 23 二 30 三 31 四 1五 2六 4日 21:04 13:30 20:02 06:26 18:39 23:13 00:16 21:12 12:12 19:39 23:31 00:16			4 ħ	<b>第</b> 六	6日	7-	12	12	10 [8]	11五	12大	13日	14-	18.2	and the second se	17例	18五	
21 04      13 30      20 02      06 26      18 39      23 13      00 16        BECON      1-2      +      21 12      19 39      23 31      00 16	10	48																
	14				21:04		24 [9]	28 <u>F</u> i	28六	13:30	and the state of the local division of the state of the s	08.26		23:13	1五	27		f
	22					+									1.90			
									1									



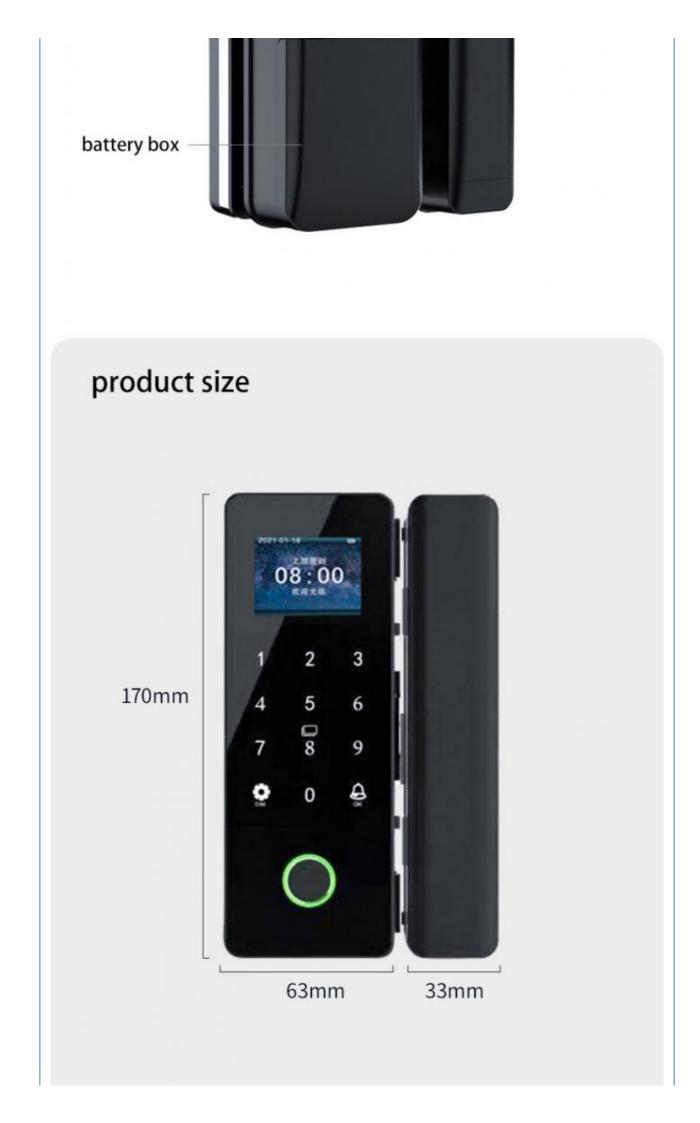

Lock tongue material: stainless steel

Fingerprint capacity:100pcs

Voice support: English

Operating temperature: -20°C-55°C

Supply voltage:DC4-6V


Power supply mode:4pcs AA batteries

Password capacity:1000pcs

IC card capacity:1000pcs

Applicable door thickness:10-12mm

## How to choose a suitable door type

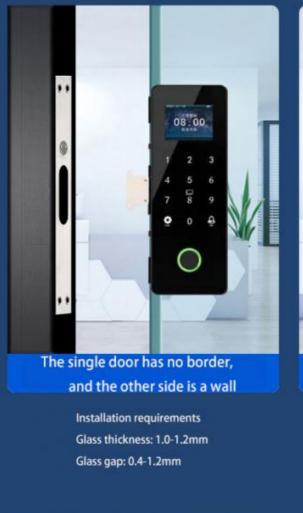

The single door has no border, and the other side is glass

08.00

Installation requirements Glass thickness: 1.0-1.2mm Glass gap: 0.4-1.2mm





# The double door has no frame and needs to be equipped with ground plug

Installation requirements

Glass thickness: 1.0-1.2mm

Glass gap: 0.4-1.2mm

matters needing attention:

Need to install ground plug

**Details Images** 



Double door with frame, wrapped door or wooden door

Installation requirements

Glass thickness: 1.0-1.2mm

Glass gap: 0.4-1.2mm

matters needing attention:

Pay attention to the opening installation;

Whether there is an empty hole in the frame and whether it can be punched;



Home lock basic configuration Front panel, rear panel, mortise, two high-frequency MF cards, two mechanical keys, one set of fixing screws, one copy of hole drawing, one manual.

Our survices

### **OEM** services



#### 1.logo on Devnce 2.Welcome Screen 3.Pre-installed APP 4.Android Settings 5.Packing Box

## **ODM** services

1.PCAB Design & Developmet 2.Tooling Design & Development 3Software Customization.

1. We provide 2% spare part for free;

- 2. We provide OEM and ODM service;
- All items come with 2 years warranty;
  We provide our lock ,your safety and
- satisfaction
- 5. Technical support will be offered
- through all the after-sales service.
- 6. During warranty period, our factory will
- offer free service for replacement;
- 7. Beyond warranty, we can also offer spare parts and maintenance with paid

service; 8. We have sent our locks to BE/ES warehouse, which will save a lot of transport cost for our business.

@LA茵朗 Dongguan Yinlang Electronic Technolog Co.,Ltd

13926821097

Linda@honglg.com 🕑 smartdoor-lock.com

10-3 The First Industrial Park, Chong Huan West Road, Shijie town, Dongguan City, Guangdong, China